


MT4B / 5B / 8B Series \varnothing 45mm, \varnothing 56mm, \varnothing 85mm Steady function Tower Light

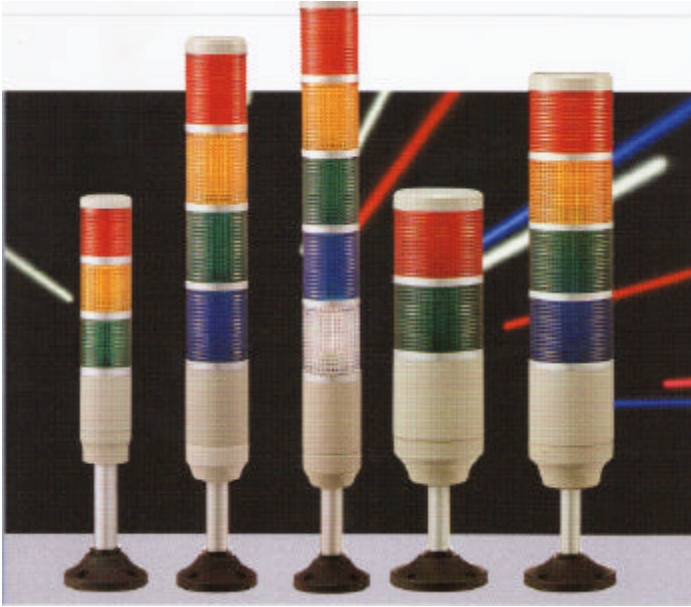

• Ordering information

		MT 5B 3 A L RYG					
		1	2	3	4	5	6
1	MT	Series					
2	48	45mm diameter only					Steady function
	5B	56mm diameter only					Steady function
	8B	85mm diameter only					Steady function
3	1	1 Stack (Red)					
	2	2 Stack (Red+Green)					
	3	3 Stack (R+Yellow+G)					
	4	4 Stack (R+Y+G+Blue)					
	5	5 Stack (R+Y+G+B+Clear)					
4	D	12VAC / DC					
	A	24VAC / DC					
	B	120VAC					
	C	240VAC					
5	L	Leads out					
6	R	Red lens					
	G	Green lens					
	Y	Yellow lens					
	B	Blue lens					
	C	Clear lens					


Features

- Prism-cut lenses for superior light distribution
- 4 mounting styles available
- One to five light models
- 4 operating voltage available
- 5 lens colors available
- Inexpensive price

Specifications

Series	MT 4B	MT 5B	MT 8B
Power supply	12VDC, 24VDC, 120VAC, 240VAC		
IP level	IP 56 / UL NEMA 12, 3R		
Lens color	Red, Green, Yellow, Blue, Clear		
Current consumption	1 Stack 12V:0.4A/24V:0.2A/120V:0.04A/240V:0.02A		12V:0.8A/24V:0.4A/120V:0.08A/240V:0.04A
	2 Stack 12V:0.8A/24V:0.4A/120V:0.08A/240V:0.04A		12V:1.7A/24V:0.8A/120V:0.17A/240V:0.08A
	3 Stack 12V:1.2A/24V:0.6A/120V:0.12A/240V:0.06A		12V:2.5A/24V:1.2A/120V:0.25A/240V:0.12A
	4 Stack 12V:1.6A/24V:0.8A/120V:0.16A/240V:0.08A		12V:3.3A/24V:1.7A/120V:0.33A/240V:0.17A
	5 Stack 12V:2.0A/24V:1.0A/120V:0.2A/240V:0.1A		12V:4.2A/24V:2.1A/120V:0.4A/240V:0.2A
Bulb type	MAB-T09-S-volt/5W		MAB-T15-D-volt/10W
Bulb voltage and wattage	12V : 12V5W, 24V : 24V5W, 120V : 120V5W, 240V : 240V5W		12V : 12V10W, 24V : 24V10W, 120V : 120V10W, 240V : 240V10W
Approvals	c UL us / CE (Only 24VAC/DC, 120VAC, 240VAC)		

Dimensions

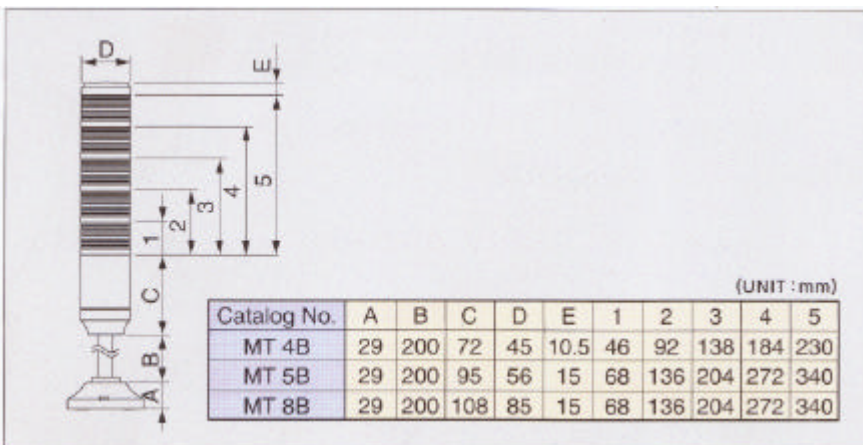

• Connections

